


Dwyer**SERIES 647**

WET/WET DIFFERENTIAL PRESSURE TRANSMITTER


$\pm 1.0\%$ Accuracy, NEMA 4 (IP56) Enclosure, 2-Wire



[4] 1/4 [6.35] LONG X 7/32 [5.56]
WIDE MOUNTING HOLES

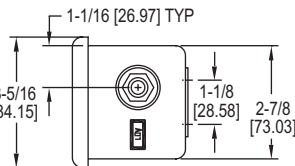

1/8 FEMALE NPT
HIGH PRESSURE CONNECTION

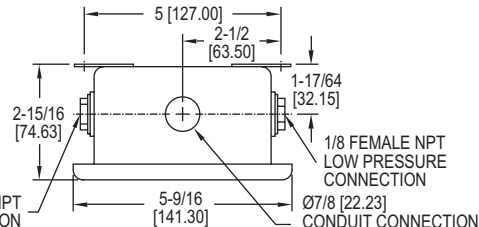

Monitor differential pressure in air/liquid flow systems, HVAC automation, pneumatic systems and process control with the **Series 647 Wet/Wet Differential Pressure Transmitter**. Units are temperature compensated and provide a 4-20 mA output signal which can be interfaced with chart recorders, data loggers and computerized monitoring and control systems.

FEATURES/BENEFITS

- Versatile for liquid or gas supports designs requiring more precise measurements in support of application
- Temperature compensated improves performance of device for accurate measurement under different operating environments
- Output signal provides capability to interface with automation systems to centralize monitoring

APPLICATIONS

- Flow
- HVAC automation
- Process control
- Pneumatic systems

MODEL CHART	
Model	Range
647-0	0 to 1 in w.c.
647-1	0 to 3 in w.c.
647-2	0 to 25 in w.c.
647-3	0 to 5 in w.c.
647-4	0 to 10 in w.c.

OPTIONS	
Use order code:	Description
NISTCAL-PT1	NIST traceable calibration certificate

SPECIFICATIONS

Service: Compatible gases or liquids on both pressure and reference sides.
Wetted Materials: Brass, vinyl, glass-filled polyester, silicon, and fluorosilicone.
Accuracy: $\pm 1.0\%$ FS.
Stability: $\pm 1.5\%$ FS output/year.
Temperature Limits: 32 to 122°F (0 to 50°C).
Pressure Limits: Ranges 1 in w.c. to 5 psi: 20 psi, 15 psi range: 45 psi, 30 psi range: 60 psi.
Thermal Effects: Zero: $\pm 0.05\%$ FS/°F; Span: $\pm 0.05\%$ rdg/°F.

Power Requirements: 18-30 VDC.
Output Signal: 4-20 mA, 2-wire.
Zero and Span Adjustments: Adjustable, $\pm 10\%$.
Loop Resistance: 400Ω @ 18 VDC, 600Ω @ 24 VDC, 1000Ω @ 30 VDC.
Electrical Connection: Screw terminals, reverse polarity protected.
Process Connections: Two 1/8" female NPT.
Housing: Gasketed steel epoxy painted, NEMA 4 (IP56).
Weight: 14 oz (397 g).

